

Installation Sheet - 4 Post Rack Kit

Kit Contents:

Rail Kit:

(2) Rail Assemblies

Side Bracket Hardware Kit:


- (8) 10-32 Screws
- (4) Side Brackets

Rear Bracket Hardware Kit:


- (2) 10-32 Screws
- (1) Rear Brackets

Rack Hardware Kit:

- (12) 10-32 Truss Head Screws
- (12) 12-24 Truss Head Screws
- (12) 10-32 Cage Nuts
- (12) 10-32 Nuts

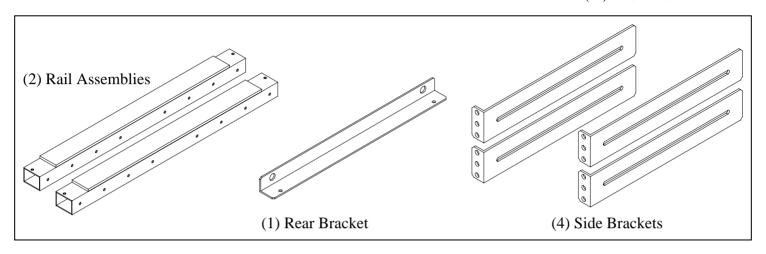

- 1. Attach the (2) Front Side Brackets as shown below using (2) 10-32 Truss Head Screws. Align the Front Side Bracket Flush to the front of the Rail Assembly.
- 2. Attach the (2) Rear Side Brackets as shown below using (2) 10-32 Truss Head Screws. Adjust the Rear Side Bracket according to post depth (maximum of 30").
- 3. Attach the Rear Bracket to the back of the Rail Assemblies.

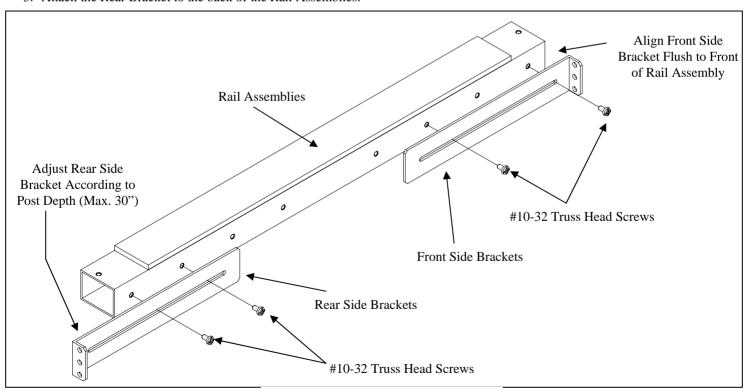



P/N: 5-TC600-5080



Installation Sheet - 4 Post Rack Kit

- 1. Attach the Shelf Assembly to the rack as shown below using the Rack Hardware Kit.
- 2. Place the CoolCube 10 onto the shelf. The CoolCube 10 must be installed through the rack's side posts for power cord/strain relief clearance. The CoolCube 10 shown below has a rack diffuser kit that is sold separately.

Rack Hardware Kit:


The Rack Hardware Kit provides various screws and nuts for the four most common types of racks.


Square Hole Racks: Install (3) Cage Nuts on each rack post in the top, middle, and bottom holes of the 1U space. Attach with the (larger) 10-32 screws.

<u>12-24 Threaded Racks:</u> Attach with the (larger) 12-24 screws. Use (3) screws on each rack post.

10-32 Threaded Racks: Attach the (smaller) 10-32 Screws. Use (3) screws on each rack post.

Round Hole Racks (non-threaded): Attach the (smaller) 10-32 Screws and the flange nuts. Use (3) screws and (3) nuts on each rack post.

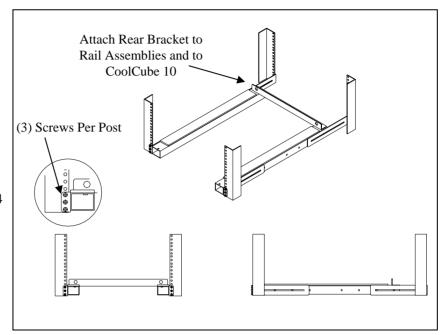

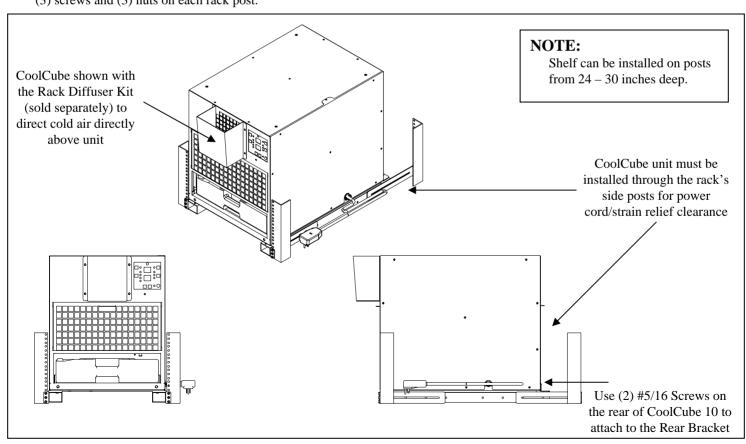



P/N: 5-TC600-5080



Installation Sheet – 2 Post Rack Kit (CENTER MOUNT)

Kit Contents:

Rail Kit:

(2) Rail Assemblies

Side Bracket Hardware Kit:


- (8) 10-32 Screws
- (4) Side Brackets

Rear Hardware Kit:


- (2) 10-32 Screws
- (1) Rear Brackets

Rack Hardware Kit:

- (12) 10-32 Truss Head Screws
- (12) 12-24 Truss Head Screws
- (12) 10-32 Cage Nuts
- (12) 10-32 Nuts

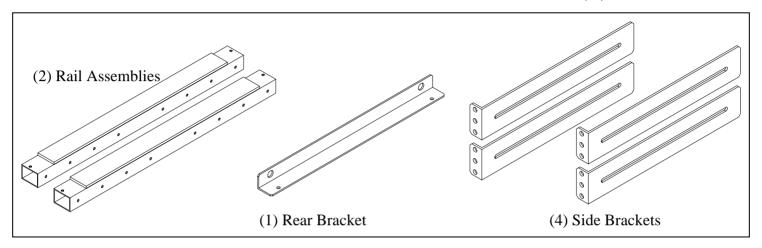

- 1. Attach the (2) Front Brackets as shown below using (2) 8-32 Flat Head Screws and (2) 8-32 Nuts from the Front Hardware Kit bag.
- 2. Attach the (2) Rear Slide Brackets as shown below using (2) 8-32 Flat Head Screws and (2) Brass Shoulder Nuts from the Rear Hardware Kit bag.
- 3. Attach the Rear Bracket to the back of the Rail Assemblies

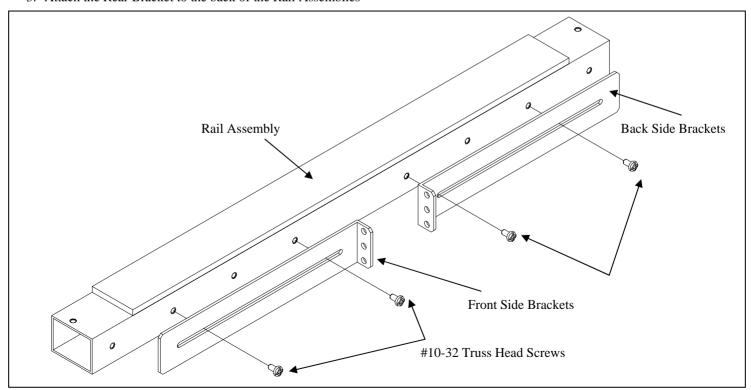



06/05 P/N: 5-TC600-5080



Installation Sheet – 2 Post Rack Kit (CENTER MOUNT)

- 1. Attach the Shelf Assembly to the rack as shown below using the Rack Hardware Kit.
- 2. Place the CoolCube 10 onto the shelf. The CoolCube 10 must be installed from rear to front on the rack for power cord/strain relief clearance. The CoolCube 10 shown below has a rack diffuser kit that is sold separately.

Rack Hardware Kit:


The Rack Hardware Kit provides various screws and nuts for the four most common types of racks.


<u>Square Hole Racks:</u> Install (3) Cage Nuts on each rack post in the top, middle, and bottom holes of the 1U space. Attach with the (larger) 10-32 screws.

<u>12-24 Threaded Racks:</u> Attach with the (larger) 12-24 screws. Use (3) screws on each rack post.

10-32 Threaded Racks: Attach the (smaller) 10-32 Screws. Use (3) screws on each rack post.

Round Hole Racks (non-threaded): Attach the (smaller) 10-32 Screws and the flange nuts. Use (3) screws and (3) nuts on each rack post.

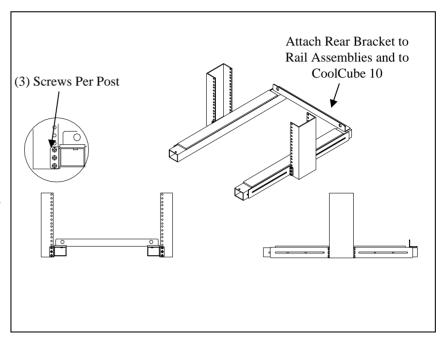

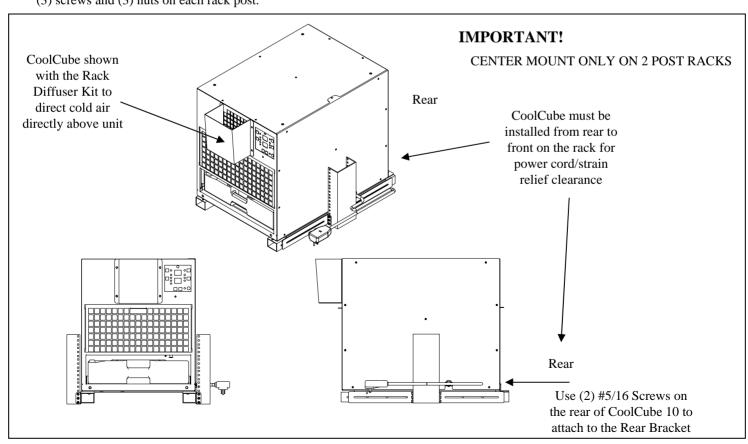



P/N: 5-TC600-5080